

```

@extends('layouts.admin')

@section('meta')
<title>Ambil</title>
@endsection

@section('style')
<link href="{{ url('css/select2.min.css') }}" rel="stylesheet" />
<style type="text/css">
    .preview{
        border-left:1px dashed #aaa;
        padding-left: 15px;
    }
    .tableku td{
        border-top: 1px solid #ddd;
        padding:10px ;
    }
    .hilangtop td{
        border-top: 0px;
    }
</style>
@endsection

@section('content')
<div class="content-wrapper">

    <!-- header main -->
    <div class="page-header">
        <h3 class="page-title">
            <span class="page-title-icon bg-gradient-danger text-white mr-2">
                <i class="mdi mdi-minus-box"></i>
            </span>
            AMBIL TABUNGAN (DEBET)
        </h3>
        <nav aria-label="breadcrumb">
            <ul class="breadcrumb">
                <li class="breadcrumb-item active" aria-current="page">
                    <span></span>Overview
                    <i class="mdi mdi-alert-circle-outline icon-sm text-
primary align-middle"></i>
                </li>
            </ul>
        </nav>
    </div>

    @if (\Session::has('error'))
        <div class="alert alert-danger">
            <i class="mdi mdi mdi-alert-circle"></i>

```



```
bilpertama = parseInt(pertama.replace(new RegExp(",", "g"), ''));
if(pertama != ''){
    $(".loadtotal").html(numberWithCommas(saldoawal-bilpertama));
}

}

$('.pricing').keyup(function(){
    text = $('.pricing').val();
    $(".loadmenabung").html(numberWithCommas(text));
    calcSaldo();

});
function remove(){
    $(".loadnama").empty();
    $(".loadsaldo").empty();
    $(".loadmenabung").empty();
    $(".loadtotal").empty();

}

function numberWithCommas(x) {
    return x.toString().replace(/\B(?=(\d{3})+(?!\d))/g, ",");
}
function submit_print(e) {
    e.preventDefault();
    $('.forms-sample').attr('action', '{{url("/ambil_cetak")}}');
    $('.forms-sample').submit();

}
</script>
@endsection
```

GRESIK

```

<!DOCTYPE html>
<html>
<head>
  <title></title>
</head>
<body>
<link rel="stylesheet" href="{{
url('vendors/iconfonts/mdi/css/materialdesignicons.min.css')}}">
<link rel="stylesheet" href="{{ url('vendors/css/vendor.bundle.base.css')}}">
<link rel="stylesheet" href="{{ url('css/style.css')}}">
<link rel="shortcut icon" href="{{ url('images/favicon.png')}}" >
<style type="text/css">
  #wrapper { width: 1024px; }
  .tableku{
    width: 100%;
  }
  .tableku td{
    padding: 10px;
    padding-top: 5px;
    padding-bottom: 5px;
    font-size: 12px;
  }
  @media print {
    .pagebreak { display:block; page-break-before:always; }
    .no-print { display: none; }
    #wrapper { max-width: 1024px; width: 100%; min-width: 250px;}
    .tableku{
      width: 100%;
    }
    .tableku td{
      padding: 10px;
      padding-top: 5px;
      padding-bottom: 5px;
      font-size: 12px;
    }
  }
</style>
  <div id="wrapper">
    @for ($ii=0; $ii <2 ; $ii++)
      <div class="card-body">
        <div class="container-fluid d-flex justify-content-center w-100">
          <div class="w-100">
            <table class="table">
              <thead style="border:none;">
                <tr style="padding: 0px;border:none;">

```

```

                <td colspan="5" style="padding:
0px;border:none;"><div style="width: 100%;display:
block;height:40px;background:#3e4b5b;"></div></td>
            </tr>
        </thead>
        <tbody>
            <tr class="text-center">
                <td colspan="5" style="border-top:
0px"><h4>BUKTI SETOR TUNAI</h4>
                    <span style="float: right;
position:relative;top:-25px;">{{($transaksi->kode == 'KREDIT') ? 'KD' :
'DB'}}-{{($transaksi->id)}}</span>
                </td>
            </tr>
            <tr class="text-center">
                <td colspan="5" style="height: 60px;border-
top: 0px"></td>
            </tr>
            <tr class="text-left">
                <td colspan="5" style="border-top: 0px">
                    <div class="row">
                        <div class="col-sm-6 name_user"
style="line-height: 18px">
                            <span style="display: inline-
block;width: 150px">Nama </span>: {{($transaksi->siswa->nama)}<br>
                            <span style="display: inline-
block;width: 150px">No Rekening </span>: {{($transaksi->siswa->nis}}
                        </div>
                        <div class="col-sm-6 text-right">
                            &nbsp;<br>
                            Tanggal : <span style="
padding:0px 0px 5px 5px; text-align:left;width:110px; border-bottom:1px solid
#333; display: inline-block; ">{{($transaksi->created_at->format('d / m /
Y'))}}</span>
                        </div>
                    </div>
                </td>
            </tr>
            <tr class="text-right">
                <td class="text-left" style="width:
150px">Nominal</td>
                <td class="text-left">: Rp. <span
style="color:#333;">{{number_format($transaksi->jumlah)}},-</span></td>
                <td></td>
                <td></td>
                <td></td>
            </tr>
            <tr class="text-right">

```

```

                                <td class="text-left" style="width:
150px">Terbilang</td>
                                <td class="text-left"><i
style="color:#333;">{{strtoupper($terbilang)}} RUPIAH</i></td>
                                <td></td>
                                <td></td>
                                <td></td>
                            </tr>
                        </tbody>
                    </table>
                </div>
            </div>
            <div class="container-fluid mt-5 w-100">
                <p class="text-right mb-2">Mengetahui</p>
                <span style="padding: 30px; display: block;"></span>
                <p class="text-right mb-5">Teller</p>
            </div>
        </div>
        @if($ii == 0)
        <div class="pagebreak"></div>
        <div class="no-print" style="margin: 20px;width: 100%;"><i>--page
break--</i></div>
        @endif

    @endfor

    <div class="container-fluid w-100 no-print">
        <a onclick="window.print();" href="" class="btn btn-primary float-
right mt-4 ml-2"><i class="mdi mdi-printer mr-1"></i>Print</a>
        <a href="{{url('/nabung')}}" class="btn btn-success float-right
mt-4"><i class="mdi mdi-telegram mr-1"></i>Kembali</a>
    </div>
</div>
<script type="text/javascript"
src="{{url('vendors/js/vendor.bundle.base.js')}}"></script>
<script type="text/javascript">
</script>
</body>
</html>

```



```

@extends('layouts.admin')

@section('meta')
<title>Admin Tabungan</title>
@endsection

@section('style')
<link rel="stylesheet" type="text/css" href="{{url('/css/jquery-ui.css')}}">
<style type="text/css">
    .ui-datepicker-calendar {
        display: none;
    }
</style>
@endsection

@section('content')
<div class="content-wrapper">

    <!-- header main -->
    <div class="page-header">
        <h3 class="page-title">
            <span class="page-title-icon bg-gradient-primary text-white mr-2">
                <i class="mdi mdi-chart-areaspline"></i>
            </span>
            Laporan
        </h3>
        <nav aria-label="breadcrumb">
            <ul class="breadcrumb">
                <li class="breadcrumb-item active" aria-current="page">
                    <span></span>Overview
                    <i class="mdi mdi-alert-circle-outline icon-sm text-
primary align-middle"></i>
                </li>
            </ul>
        </nav>
    </div>

    <div class="row">
        <div class="col-md-12 grid-margin stretch-card">
            <div class="card">
                <div class="card-body">
                    <h4 class="card-title">Laporan Saldo Tiap Siswa</h4>
                    <div class="">
                        <div class="form-group">
                        </div>
                        <div class="row">
                            <div class="col-sm-4">
                                <label for="startDate">Filter Bulan :</label>

```

```

        <form action="" class="filter" method="get">

        <div class="form-group">
            <div class="input-group">
                <input name="startDate" id="startDate"
class="date-picker" value="{{isset($date) ? $date : ''}}"/>
            </div>
        </div>

        </form>
    </div>
    <div class="col-sm-8">
        <div class="text-right"><a class="btn btn-sm
btn-gradient-primary float-right" href="{{url('/cetak-laporan-
bulanan')}}{{isset($date) ? $date : ''}}"><i class="mdi mdi-printer"></i>
Cetak Laporan</a></div>

    </div>
</div>
<table class="table table-bordered">
    <thead>
        <tr>
            <th>
                Id
            </th>
            <th>
                Nama
            </th>
            <th>
                No Rekening
            </th>
            <th>
                Jumlah Saldo
            </th>
            <th>
                cetak transaksi dalam 1 bulan
            </th>
        </tr>
    </thead>
    <tbody>
        @foreach($siswas as $siswa)
            <tr>
                <td>
                    <strong>{{{$siswa->id}}</strong>
                </td><td>
                    <strong>{{{$siswa->nama}}</strong>
                </td>
                <td class="">
                    {{{$siswa->nis}}

```



```

        var month = $("#ui-datepicker-div .ui-datepicker-month
:selected").val();
        var year = $("#ui-datepicker-div .ui-datepicker-year
:selected").val();
        $(this).datepicker('setDate', new Date(year, month,
1)).trigger('change');

        $('.date-picker').focusout();//Added to remove focus
from datepicker input box on selecting date
        $('.filter').submit();
    }
},
beforeShow : function(input, inst) {

    inst.dpDiv.addClass('month_year_datepicker')

    if ((datestr = $(this).val()).length > 0) {
        year = datestr.substring(datestr.length-4,
datestr.length);
        month = datestr.substring(0, 2);
        $(this).datepicker('option', 'defaultDate', new
Date(year, month-1, 1));
        $(this).datepicker('setDate', new Date(year, month-1,
1));

        $(".ui-datepicker-calendar").hide();
    }
}
});
});
</script>
@endsection

```

GRESIK

```

@extends('layouts.auth')

@section('content')
<div class="content-wrapper d-flex align-items-center auth">
  <div class="row w-100">
    <div class="col-lg-4 mx-auto">
      <div class="auth-form-light text-left p-5">
        <div class="brand-logo text-center">
          
        </div>
        <h4 class="text-center">{{env('NAMA_INSTANSI')}}</h4>
        <h6 class="text-center font-weight-light">Silahkan login untuk
melanjutkan</h6>
        <form class="pt-3" method="POST" action="{{ route('login')
}}">
          {{ csrf_field() }}
          <div class="form-group {{ $errors->has('email') ? ' has-
error' : '' }}">
            <input type="text" class="form-control form-control-
lg" id="exampleInputEmail1" placeholder="Username / Email " name="login"
value="{{ old('username') ?: old('email') }}" required autofocus>
            @if ($errors->has('username') || $errors-
>has('email'))
              <span class="invalid-feedback">
                <strong>{{ $errors->first('username') ?:
$errors->first('email') }}</strong>
              </span>
            @endif
          </div>
          <div class="form-group {{ $errors->has('password') ? '
has-error' : '' }}">
            <input type="password" class="form-control form-
control-lg" id="exampleInputPassword1" placeholder="Password" value="123123"
name="password" required>
            @if ($errors->has('password'))
              <span class="help-block">
                <strong>{{ $errors->first('password')
}}</strong>
              </span>
            @endif
          </div>
          <div class="mt-3">
            <button class="btn btn-block btn-gradient-primary btn-
lg font-weight-medium auth-form-btn" >Masuk</button>
          </div>
          <!-- <div class="my-2 d-flex justify-content-between
align-items-center">
            <div class="form-check">

```

```
        <label class="form-check-label text-muted">
          <input class="form-check-input" type="checkbox"
name="remember" {{ old('remember') ? 'checked' : '' }}>
          Biarkan tetap masuk!
        </label>
      </div>
      <a href="{{ route('password.request') }}" class="auth-
link text-black">Lupa Password?</a>
    </div>
    <div class="text-center mt-4 font-weight-light">
      Don't have an account? <a href="register.html"
class="text-primary">Create</a>
    </div> -->
  </form>
</div>
</div>
</div>
</div>
@endsection
```



```

@extends('layouts.admin')

@section('meta')
<title>Nabung</title>
@endsection

@section('style')
<link href="{{ url('css/select2.min.css') }}" rel="stylesheet" />
<style type="text/css">
    .preview{
        border-left:1px dashed #aaa;
        padding-left: 15px;
    }
    .tableku td{
        border-top: 1px solid #ddd;
        padding:10px ;
    }
    .hilangtop td{
        border-top: 0px;
    }
</style>
@endsection

@section('content')
<div class="content-wrapper">

    <!-- header main -->
    <div class="page-header">
        <h3 class="page-title">
            <span class="page-title-icon bg-gradient-success text-white mr-2">
                <i class="mdi mdi-library-plus"></i>
            </span>
            INPUT TABUNGAN (KREDIT)
        </h3>
        <nav aria-label="breadcrumb">
            <ul class="breadcrumb">
                <li class="breadcrumb-item active" aria-current="page">
                    <span></span>Overview
                    <i class="mdi mdi-alert-circle-outline icon-sm text-
primary align-middle"></i>
                </li>
            </ul>
        </nav>
    </div>

    @if (\Session::has('error'))
        <div class="alert alert-danger">
            <i class="mdi mdi mdi-alert-circle"></i>

```



```

        if(pertama != ''){
            $(".loadtotal").html(numberWithCommas(bilpertama+saldoawal));
        }


    }
    $('.pricing').keyup(function(){
        text = $('.pricing').val();
        $(".loadmenabung").html(numberWithCommas(text));
        calcSaldo();

    });
    function remove(){
        $(".loadnama").empty();
        $(".loadsaldo").empty();
        $(".loadmenabung").empty();
        $(".loadtotal").empty();

    }
    function numberWithCommas(x) {
        return x.toString().replace(/\B(?=(\d{3})+(?!\d))/g, ",");
    }
    function submit_print(e) {
        e.preventDefault();
        $('.forms-sample').attr('action', '{{url("/nabung_cetak")}}');
        $('.forms-sample').submit();

    }
</script>
@endsection

```

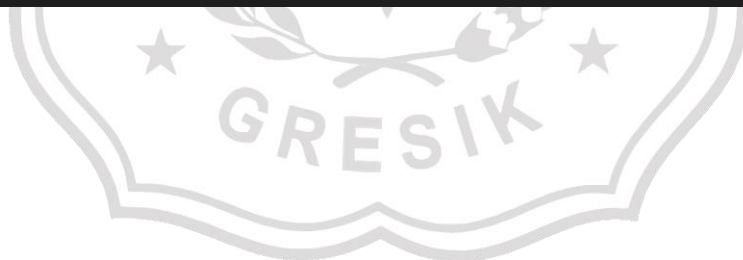


```

        <th>
            Terdaftar
        </th>
        <th>
            Wali Kelas
        </th>
        <th>
            Aksi
        </th>
    </tr>
</thead>
<tbody>
    @foreach($siswas as $siswa)
    <tr>
        <td class="">
            {{ $siswa->nis }}
        </td>
        <td>
            <strong>{{ $siswa->nama }}</strong>
        </td>
        <td>
            @if($siswa->status == 'active')
            <label class="badge badge-
success">Aktif</label>
            @else
            <label class="badge badge-
secondary">Off</label>
            @endif
        </td>
        <td>
            Rp. {{ number_format($siswa->saldo) }}
        </td>
        <td>
            {{ $siswa->created_at->format('D, m Y') }}
        </td>
        <td>
            {{ !empty($siswa->wali->name) ? $siswa-
>wali->name : '-' }}
        </td>
        <td>
            <a href="{{ url('/siswa/edit') }}" {{ $siswa-
>id }}" class=" btn-link">Edit</a> | <a href="{{ url('/siswa/print-
cover') }}" {{ $siswa->id }}" class=" btn-link">Cetak Kover</a>
        </td>
    </tr>
    @endforeach
</tbody>
</table>

```

